

## DISCRETE ELEMENT MODELLING OF SOLID STATE SINTERING PROCESS OF METAL-CERAMIC COMPOSITE

*S. Nosewicz<sup>1</sup>, J. Rojek<sup>1</sup>, K. Pietrzak<sup>2</sup>, M. Chmielewski<sup>2</sup>, D. Kaliński<sup>2</sup>, R. Kačianauskas<sup>3</sup>*

<sup>1</sup>*Institute of Fundamental Technological Research Polish Academy of Science, Warsaw, Poland*

<sup>2</sup>*Institute of Electronic Materials Technology, Warsaw, Poland*


<sup>3</sup>*Vilnius Gediminas Technical University, Vilnius, Lithuania*

The paper presents discrete element modelling of two-phase powder sintering process. Sintering is the main stage of powder metallurgy process, which is the most common technique of fabricate metal matrix composites with ceramic reinforcement, advanced materials with several applications. As a technological process powder metallurgy consists of several stages including metal and ceramic powder manufacturing, preparation of metal-ceramic powder mixture, powder pressing and sintering. Sintering consists in consolidation of loose or weakly bonded powders at elevated temperatures, close to the melting temperature with or without additional pressure. This is a complex process affected by many factors. Modelling can be used to optimize and to understand better the sintering process and improve the quality of sintered components.

Modelling of sintering process is still a challenging research task. There are different approaches in modelling of sintering processes, ranging from continuum phenomenological models to micromechanical and atomistic ones. In this work, the micromechanical model of sintering was implemented in the discrete element method framework. In the discrete element method, material is represented as a large collection of particles interacting with one another by contact forces. It is a suitable tool to model granular and rock materials [1]. Modelling of sintering requires introduction of the cohesive interaction among particles representing inter-particle sintering forces. Following [2] the discrete element model adopted in this work employs the following equation for the sintering interaction between powder grains:

$$(1) \quad F = \pi\gamma_S \left[ 4R \left( 1 - \cos \frac{\Psi}{2} \right) + a \sin \frac{\Psi}{2} \right] + \frac{\pi a^4}{8D_b} V$$


where  $V$  is the normal relative velocity,  $R$  – the particle radius,  $a$  – the radius of the interparticle grain boundary,  $\Psi$  – the dihedral angle,  $\gamma_S$  – the surface energy and  $D_b$  – the effective grain boundary diffusion coefficient. The first term on the right hand side of Eq. (1) represents the sintering driving force and the second one – the viscous resistance of the material. The geometrical parameters of the model are defined in Fig. 1.

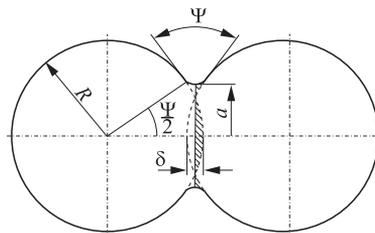

**Rysunek 1.** Two-particle model of sintering.

The model has been extended to include elastic and thermal effects. It enables modelling of a powder metallurgy process consisting of powder compaction, sintering and cooling of the sintered component. It allows us to study the grains during sintering and rearrangement of grains during sintering, material shrinkage and internal stresses.

The numerical model has been applied to analyze sintering behaviour of different mixtures NiAl/Al<sub>2</sub>O<sub>3</sub>. Numerical simulations are combined with experimental studies of sintering. First, sintering of each phase, NiAl and Al<sub>2</sub>O<sub>3</sub>, is studied separately at different parameters: temperature, time and pressure. Finally, sintering of mixtures NiAl/Al<sub>2</sub>O<sub>3</sub> will be performed at similar conditions. The kinetics of sintering is evaluated by investigation of the bulk density change in time. The evolution of the bulk density obtained in experimental studies is used in calibration and validation of the numerical model. Comparison of experimental and numerical results for sintering of NiAl powder at temperature 1300°C under pressure of 30 MPa is shown in Fig. 2a. Since experimental tests for mixtures NiAl/Al<sub>2</sub>O<sub>3</sub> have not been finished yet, numerical results are shown only in Fig. 2b.

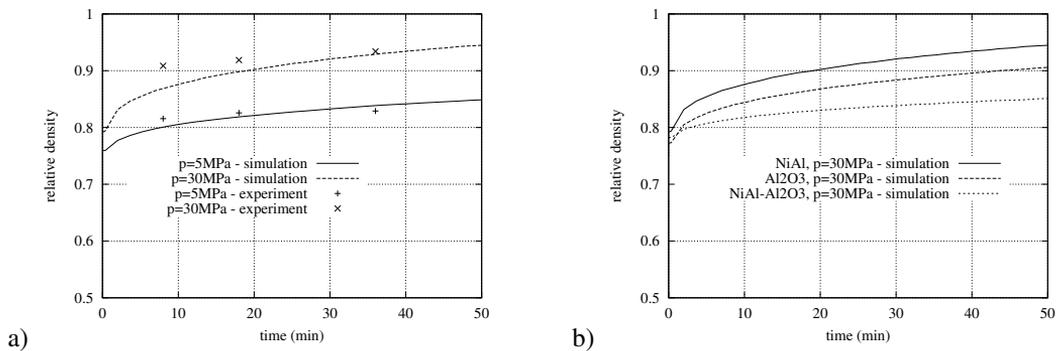

**Rysunek 2.** Evolution of relative density during sintering: a) numerical vs. numerical results for NiAl, b) numerical results for NiAl, Al<sub>2</sub>O<sub>3</sub> and mixture NiAl/Al<sub>2</sub>O<sub>3</sub>.

### Acknowledgements

The results presented in this paper have been obtained within the project “KomCerMet” (contract no. POIG.01.03.01-14-013/08-00 with the Polish Ministry of Science and Higher Education) in the framework of the Operational Programme Innovative Economy 2007-2013.

### References

- [1] J. Rojek, E. Oñate, C. Labra, H. Kargl: Discrete element simulation of rock cutting. *International Journal of Rock Mechanics and Mining Sciences*, 48 (2011), 996–1010.
- [2] C.L. Martin, L.C.R. Schneider, L. Olmos, D. Bouvard: Discrete element modeling of metallic powder sintering. *Scripta Materialia*, 55 (2006), 425–428.