



LIGHTWEIGHT STRUCTURES in CIVIL ENGINEERING

CONTEMPORARY PROBLEMS

Monograph from Scientific Seminar

Organized by Polish Chapters of

International Association for Shell and Spatial Structures

Technical University of Łódź

Faculty of Civil Engineering, Architecture and Environmental

Engineering

XXIV LSCE

Łódź, 7th of December 2018 (Friday)



STRESS INTENSITY DRIVEN TOPOLOGY OPTIMIZATION FOR MORPHOGENESIS OF 3D ELASTOPLASTIC STRUCTURES

B. Blachowski¹⁾ **P. Tazowski**²⁾ **J. Logo**³⁾

¹⁾Dr, Institute of Fundamental Technological Research, Polish Academy of Sciences, POLAND, bblach@ippt.pan.pl

²⁾Dr, Institute of Fundamental Technological Research, Polish Academy of Sciences, POLAND, ptazow@ippt.pan.pl

³⁾Professor, Budapest University of Technology and Economics, HUNGARY, logo@ep-mech.me.bme.hu

ABSTRACT: The purpose of this study is a practical engineering formulation of the topology optimization problem for three dimensional elastoplastic structures. The present study constitutes a comprehensive approach to topology optimization of elastoplastic structures, including both the mechanical problem statement and its efficient computer implementation.

Instead of the traditional approach based on compliance minimization the aim of this work is to find a minimum weight structure, which is able to carry a given load while satisfying the condition that the corresponding stresses do not exceed an allowable limit. The general form of the problem is based on the classical limit design formulations of plasticity. The proposed method finds the optimal structure in an iterative way using only stress intensity distribution and does not require from the User explicit knowledge of any gradients or sensitivities. The effectiveness of the proposed methodology has been illustrated on two representative examples including simply supported and cantilever beams.

Keywords: computational morphogenesis, topology optimization, elastoplastic structures, minimum-weight design, stress constraints.

1. INTRODUCTION

The traditional approach to design of engineering structures relies on a set of candidate structural systems from which, based on the results of finite element analysis, the optimal solution is chosen. The optimal structure found in this way strongly depends on the structural engineer's experience and in the case of newly designed structures of complex functionality, such an approach might not necessarily give a truly optimal solution.

As a result of this, structural topology optimization has been proposed to give an even less experienced designer more flexibility in her or his work. There are two alternative methods for finding structures of optimal topology, namely the continuum based approach and the truss layout method. The former assumes that the whole allowable design space is filled with a solid material from which the optimal topology (a truss-like structure) is extracted. The latter uses a dense grid of nodes connected by bars in all possible ways, from which only the most effective bars are left in the final optimal solution.

Among the civil engineering community topology optimization is also known as 'Structural morphology' or more specifically as 'computational morphogenesis'. As is commonly known, the beginnings of computational morphogenesis are dated at 1904 when the revolutionary work by Michell was published. However, the first topology work was presented by Maxwell in 1870 (Ref.1). Since that time many researchers contributed to this field and it is beyond the scope of this short literature review to mention all of them. For that reason, only the most representative papers are referred to here. However, an excellent comprehensive review of the Michell-type structures can be found in the book by Lewiński et al. (Ref.2).

Essentially, two basic approaches are applied in the case of continuum structures. These are: the fully stressed design (FSD) method (Gallagher, Ref.3, Berke and Khot, Ref.4) and the Solid Material with Penalization (SIMP) method (Bendsoe, Ref.5).

In the first method we tend to obtain such a topology for which stresses within the whole structure are close or equal to the yield limit. The second method assumes that the designed structure is made of a porous material for which effective material properties are represented by density-like parameter based techniques. The FSD is based on the principle, that all elements are fully stressed (in this way the local stress constraints are fulfilled while the SIMP method generally does not use local stress constraints. The modified version of the SIMP-type algorithm is suitable for using local stress constraints.

A method for finding optimal topologies based on the FSD approach has been proposed by Xie and Steven (Ref.6), while Duysinx and Bendsoe (Ref.7) used the SIMP approach.

An additional difference between the FSD and SIMP methods is related to the applied objective function. In FSD, researchers usually minimize the weight of the structure under stress constraints, while in SIMP the objective function is the structure's compliance and constraints are imposed on the volume fraction. An interesting comparison of the minimum weight design under both stress and compliance constraints has been presented by Bruggi and Duysinx (Ref.8).

It is worth noting here that the frequently cited paper by Bendsoe and Kikuchi (Ref.9) showing that the optimal layout can be generated by the representative volume element of a specific porous composite is not fully correct, since the 1st rank composites do not lead to the optimal solution as it was shown by Allaire and Aubry (Ref.10). The first correct papers on compliance minimization of elastic structures were written by Lurie, Cherkov and co-authors already in the 1970's (Ref.11). Additionally, SIMP utilizes a simplified assumption that the stiffness modulus depends on density through a power law, whereas in other approach such as homogenization this claim is not supported. The homogenized modulus depends on the density in a different manner, rather Pade approximation is necessary, as it was presented in the paper by Tokarzewski and Telega (Ref.12). Besides the above papers assuming linearly elastic material behaviour there are papers

investigating elasto-plastic materials (example is paper by Pedersen and Taylor, Ref.13).

Within the International Association for Shell and Spatial Structures (IASS) there is a working group called 'Structural morphology' and its activity since the foundation in 1991 has been described by Motro (Ref.14). Recent developments in computational morphogenesis can be found in review papers by Ohmori (Ref.15) and Li et al (Ref.16).

The Authors background in the field of topology optimization contains the development of new methods based on optimality criteria (Ref.17) or structural optimization with the aid of graphs (Ref.18). Recently, the Authors extended their approach to topology optimization of structures made of elasto-plastic materials (Ref.19, 20 and 21) and subjected to multiple loading cases (Refs.22 and 23).

At the end of this short overview of different aspects of computational morphogenesis it is worthwhile to mention papers describing the application of topology optimization in architecture and in particular in conceptual design of tall building (Beghini et al Ref.24 and Kazakis et al, Ref.25) or even airplane wings (Aage, Ref.26).

The aim of this work is to present a practical method for topology optimization of 3D continuum structures subjected to stress constraints. Structural weight is considered in this study as the objective function contrary to the classical compliance approach with a volume fraction constraint. The method presented here, although simple, can be successfully used to design optimal structures of various types such as skeletal buildings or stadium roofs. The method is based on determining the stress intensity within the structure and then applying a redundant material removal strategy to the least stressed regions of the structure. This procedure is repeated until the load capacity of the structure may become exceeded.

Finally, the effectiveness of the proposed methodology is demonstrated on several benchmark problems such as a simply supported structure subjected to multiple loading conditions.

2. METHODS, THEORY AND CALCULATION

In the following sections topology optimization under stress constraints will be formulated in continuous domain. Then, the problem will be discretized using standard finite element method and finally some computational aspects will be discussed.

2.1. Topology optimization of elastoplastic structures - problem statement

In the present study we are looking for minimum weight structures made of elastoplastic material. Constraints are imposed on allowable stresses and density.

Mathematically, we can express our approach for topology optimization in the following form

$$\begin{aligned} \text{Minimize volume } & V = \int_V \rho(x_i) dV & (1) \\ \text{Subjected to } & \int_V \sigma_{ij} \delta \varepsilon_{ij} dV - \int_{\Gamma} f_i \delta u_i d\Gamma = 0 \\ & d\sigma_{ij} = D^{ep} d\varepsilon_{ij} \\ & \sigma_{HMH} \leq \sigma_0 \\ & \rho_{\min} \leq \rho \leq 1 \end{aligned}$$

where V is the volume of the structure, σ_{ij} is the stress tensor, $\delta \varepsilon_{ij}$ is the virtual strain, f_i represents external loading, δu_i is the virtual displacement, D^{ep} - elastoplastic material stiffness tensor, σ_{HMH} is the Huber - von Mises - Hencky stress, σ_0 denotes the yield limit and finally $\rho(x_i)$ represents the density of the material distribution.

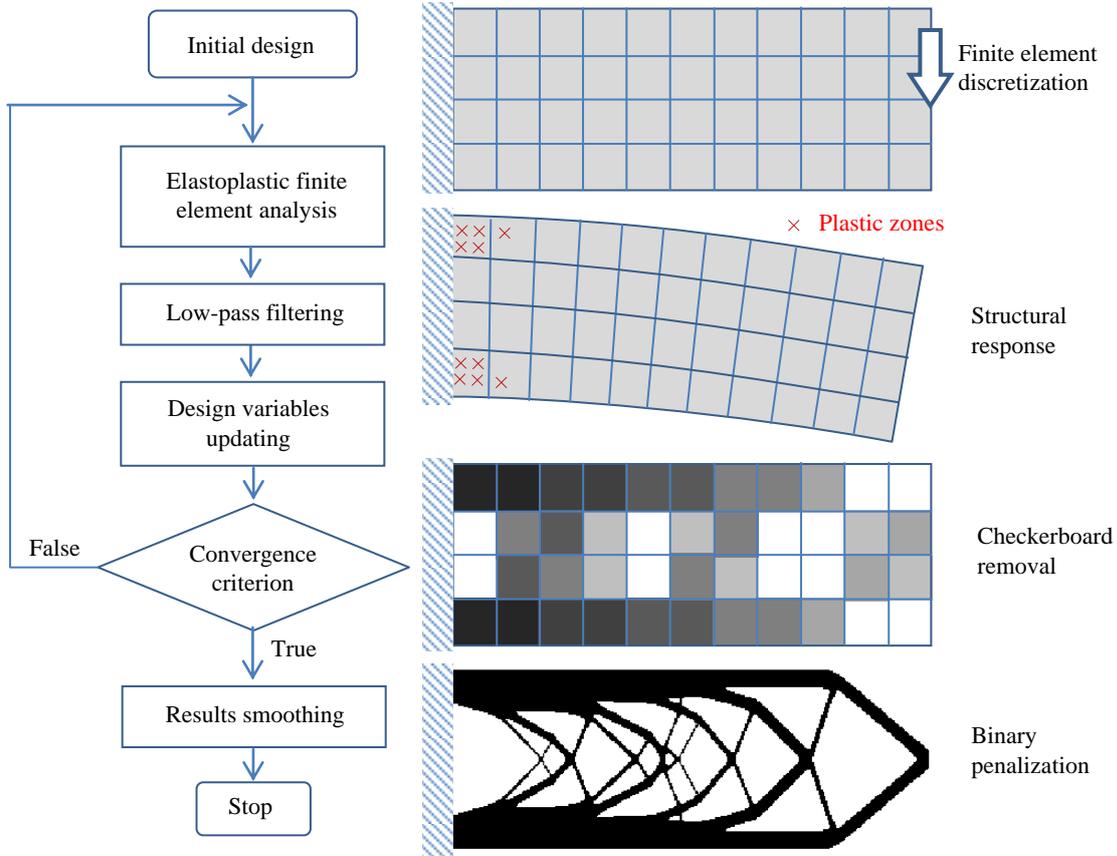


Fig 1. Computational steps in structural topology optimization

In modern computational mechanics the above continuous formulation of topology optimization is typically replaced with discretized version obtained with aid of the finite element method. Then, instead of (1) the structural topology optimization investigated in this study can be expressed in the following form:

$$\begin{aligned} &\text{Minimize volume } V = \rho^T \mathbf{A} \\ &\text{Subjected to } \mathbf{K}(\rho) \mathbf{u}(\rho) - \mathbf{f} = \mathbf{0} \\ &\quad \sigma/\sigma_0 - 1 \leq \mathbf{0} \\ &\quad \rho_{\min} \leq \rho \leq \mathbf{1} \end{aligned} \quad (2)$$

where \mathbf{A} is a vector representing area of individual finite element, $\mathbf{K}(\rho)$ denotes tangent stiffness matrix depending on the design variables ρ , $\mathbf{u}(\rho)$ is displacement vector, \mathbf{f} is external loading vector.

The general flowchart of topology optimization problem is presented in Figure 1. As we can easily observe two main parts in the problem can be identified. The first one is devoted to elastoplastic analysis using finite element method and return mapping algorithm, while the second one is connected to iterative modification of design variables using selected updating scheme.

Algorithm 1. Stress intensity driven topology optimization

Step 1. Initialize *design variables* as a vector of ones $\rho^{(0)} = \{1, 1, \dots, 1\}$ and *erased element list* as an empty list $\mathcal{L} = \{\}$.

Step 2. Until load capacity is not exceeded repeat **Steps 3 to 7**.

Step 3. At k -th iteration of the optimization algorithm solve nonlinear equilibrium equations for elastoplastic problem $\mathbf{K}(\rho^{(k)}) \mathbf{u}(\rho^{(k)}) - \mathbf{f} = \mathbf{0}$.

Step 4. Determine stress intensity vector $\sigma_{\text{avg},e}$ for every finite element $e=1 \dots N_e$ calculated as average of equivalent von Mises stresses $\sigma_{\text{HMH},g}$ evaluated at each Gauss point $g=1 \dots N_g$, then normalize obtained value dividing it by yield limit $\sigma_{\text{avg},e} = 1/(N_g \sigma_0) \sum_{g=1 \dots N_g} \sigma_{\text{HMH},g}$.

Step 5. Apply design filter to avoid checkerboard phenomenon. To this end the filtering technique proposed by Sigmund in his famous 99 line code can be used

$$[\sigma_{\text{avg},e}]_{\text{FILT}} = 1/(\rho_e^{(k)} \sum_{f=1 \dots N_e} H_f) \sum_{f=1 \dots N_e} H_f \rho_f^{(k)} \sigma_{\text{avg},f}$$

where the convolution operator H_f is understood as $H_f = r_{\min} - \text{dist}(e, f)$, $\{f\}$ belongs to the set of elements, for which the following condition is satisfied $\text{dist}(e, f) \leq \text{given radius}$,

The operator $\text{dist}(e, f)$ is defined as the distance between the center of element e and center of element f . H_f is zero outside the filter area.

Step 6. Select n finite elements with smallest stresses and assign to their corresponding design variable values to ρ_{\min} i.e. to the lower bound for design variables. Then, add the list of newly selected elements l to the list of previously erased elements $\mathcal{L}^{\text{new}} = \{\mathcal{L}^{\text{new}}; l\}$.

Step 7. Using current list of erased elements \mathcal{L} update corresponding design variables applying the following iterative formula:

$$\rho^{(k+1)} = \rho^{(k)} [\sigma_{\text{avg}}]^p$$

where p is penalty factor to avoid porous intermediate solution. Three different cases are distinguished here:

- if $\rho^{(k)} [\sigma_{\text{avg}}]^p \leq \rho_{\min}$
then $\rho^{(k+1)} = \rho_{\min}$
- if $\rho^{(k)} [\sigma_{\text{avg}}]^p \geq 1$
then $\rho^{(k+1)} = 1$
- if $\rho^{(k)} [\sigma_{\text{avg}}]^p \geq \rho_{\min}$ and $\rho^{(k)} [\sigma_{\text{avg}}]^p \leq 1$
then $\rho^{(k+1)} = \rho^{(k)} [\sigma_{\text{avg}}]^p$

3. RESULTS

To check correctness of the implemented algorithm several benchmark examples have been calculated. The first example is a plane stress

structure with dimension 30m x 10m (fig. 2) and loaded in the middle at top edge. Structure are simply supported with the booth degree of freedoms blocked at the left bottom corner and the roller at the right bottom corner.

Material parameters in example 1 are following:

$$\begin{aligned} E &= 34.474 \text{ GPa} \\ \nu &= 0.11 \\ \rho &= 568.7 \text{ kg/m}^3 \\ \sigma_0 &= 210 \text{ MPa} \\ \text{thickness} &= 0.2286 \text{ m} \\ \text{penalty parameter} &= 1.75 \\ \text{filter radius} &= 2 \end{aligned}$$

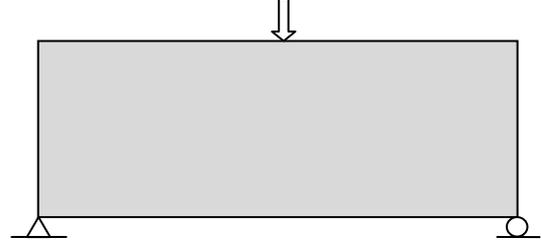


Fig.2. Design domain and boundary conditions for example 1.

Two load versions of load has been applied. First one (Fig.3) is 0.5 x collapse load and second one 0.95 x collapse load (Fig.4). Both solutions are similar with literature results although second one with load closer to collapse load is significantly thicker.

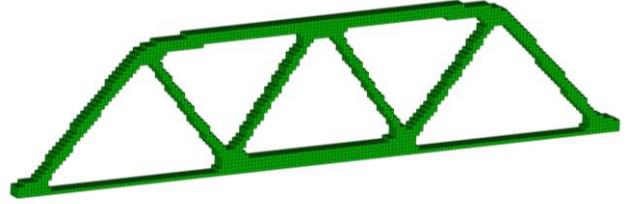


Fig.3. Optimal topology for load equal to 0.5 x collapse load.

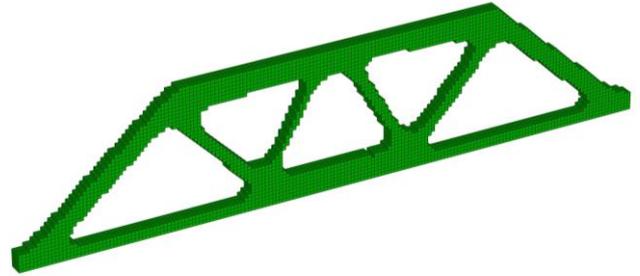


Fig.4. Optimal topology for load equal to 0.95 x collapse load.

Next example is a cantilever with force acting at its end (Fig.5). Dimensions of design space are 20m x 10m. This example is also computed using the above methodology.



Fig.5. Design domain and boundary conditions for example 2.

Material parameters used in this second example are as follows:

- $E = 34.474 \text{ GPa}$
- $\nu = 0.11$
- $\rho = 568.7 \text{ kg/m}^3$
- $\sigma_0 = 210 \text{ MPa}$
- thickness = 0.2286 m
- penalty parameter = 1.75
- filter radius = 2.

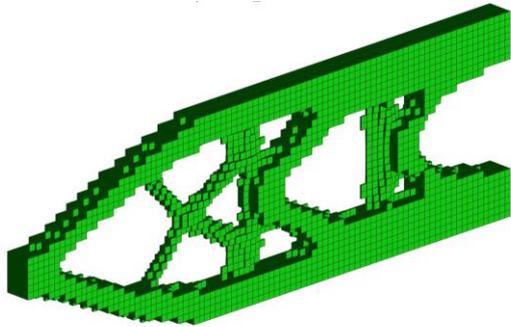


Fig.6. Optimal topology of a cantilever structure for load factor 0.5.

This example also has been computed with two load version one with half value of collapse force (fig.5). We observe good agreement with similar solution taken from the literature. In the case of a plastic-elastic material, the load value significantly influences the results. The more the load approaches the value of the collapse force, the thicker the topology arises. On figures 6 and 7 we present optimal topologies for load factors equal to 50 and 95 per cent of the ultimate load of initial topology, respectively.

The third example illustrates the parametric studies of the variation of the size of the penalty parameter and the filter radius smoothing the chessboard effect. The task data are the same as in the first example.

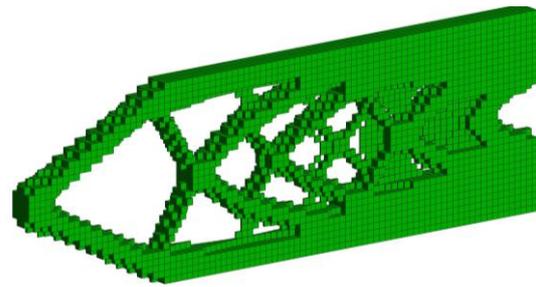




Fig.7. Optimal topology of a cantilever structure for load factor 0.95.

Material parameters of the third example are:

- $E = 34.474 \text{ GPa}$
- $\nu = 0.11$
- $\rho = 568.7 \text{ kg/m}^3$
- $\sigma_0 = 210 \text{ MPa}$
- thickness = 0.2286 m

The variation of the smoothing radius works more similarly as the load change. The larger the radius of the smoothing filter, the thicker the topology we get. The penalty parameter also affects the thickness of the structure but less than the radius of the smoothing filter. The smaller the penalty parameter, the thinner the design (Table 1).

Table 1. Influence of the filter radius and penalty factor on optimal volume
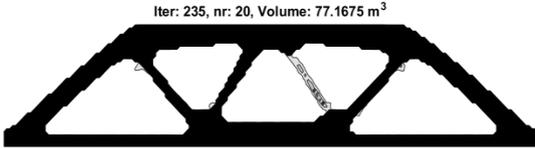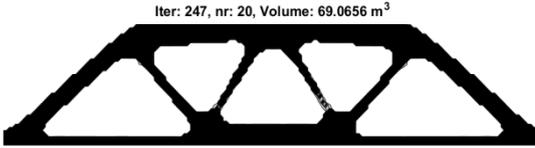
| Penalty | Filter radius | |
|---------|--|---|
| | 4 | 6 |
| 1.5 | Iter: 266, nr: 20, Volume: 60.2097 m ³  | Iter: 235, nr: 20, Volume: 77.1675 m ³  |
| 1.75 | Iter: 279, nr: 20, Volume: 51.3853 m ³  | Iter: 247, nr: 20, Volume: 69.0656 m ³  |
| 2.0 | Iter: 278, nr: 20, Volume: 50.782 m ³  | Iter: 247, nr: 20, Volume: 68.1083 m ³  |
| 3.0 | Iter: 277, nr: 20, Volume: 49.8777 m ³  | Iter: 250, nr: 20, Volume: 65.4279 m ³  |

4. CONCLUSIONS

In the paper a practical approach to structural topology optimization known also as a '*computational morphogenesis*' has been proposed. The overall method is able to deal with 2D and 3D elastoplastic problems subjected to stress constraints.

The presented contribution consists of a novel formulation of structural topology optimization problem, computer implementation using a high-level programming language and numerical examples. All the above contributions proved that the method can be successfully applied in solving realistic engineering problems and replace the classical compliance minimization technique.

The computer implementation proposed in this study demonstrated that our stress intensity driven topology optimization can be utilized in two ways:

- a). it can be easily adapted to existing FE codes, expanding their functionality, or
- b). it can be implemented from scratch in languages for technical computing such as MATLAB.

Following the second route, a prototype program has been developed to demonstrate the effectiveness of the proposed method for computational morphogenesis.

ACKNOWLEDGEMENTS

The present study was supported by the National Research, Development and Innovation Office (grant K 119440) and) and by the joint grant of the Hungarian and the Polish Academy of Sciences.

REFERENCES

1. J.C. Maxwell (1870), On Reciprocal Figures, Frames, and Diagrams of Forces. Transactions of the Royal Society of Edinburgh, 26, (1) , 1–40.
2. T. Lewiński, T. Sokół, C. Graczykowski, (2019) Michell Structures, ISBN 978-3-319-95179-9, Springer, Cham
3. R. H. Gallagher (1973) Fully Stressed Design, in "Optimum Structural Design: Theory and Application"
4. L. Berke and N. S. Khot (1974) Use of optimality criteria methods for large scale systems, in AGARD Lecture Series on Structural Optimization, no. 70.
5. M.P. Bendsoe, Optimal shape design as a material distribution problem, Structural Optimization (1989), Volume 1, Issue 4, pp 193–202. <https://doi.org/10.1007/BF01650949>
6. Y.M. Xie and G.P. Steven (1993) A simple evolutionary procedure for structural optimization, Computers & Structures, Volume 49, no.5, pp. 885–896, Dec. 1993.
7. P. Duysinx and M.P. Bendsoe (1998) Topology optimization of continuum structures with local stress constraints, International Journal for Numerical Methods in Engineering, vol. 43, no. 8, pp. 1453–1478, Dec. 1998.
8. M. Bruggi, P. Duysinx (2012) Topology optimization for minimum weight with compliance and stress constraints, Structural and Multidisciplinary Optimization, September 2012, Volume 46, Issue 3, pp 369–384. <https://doi.org/10.1007/s00158-012-0759-7>
9. M.P. Bendsoe, N. Kikuchi (1988) Generating optimal topologies in structural design using a homogenization method, Computer Methods in Applied Mechanics and Engineering, Volume 71, Issue 2, Pages 197–224, [https://doi.org/10.1016/0045-7825\(88\)90086-2](https://doi.org/10.1016/0045-7825(88)90086-2)
10. G. Allaire, S. Aubry, Structural Optimization (1999), On optimal microstructures for a plane shape optimization problem, Volume 17, Issue 2–3, pp 86–94. <https://doi.org/10.1007/BF01195933>
11. K.A. Lurie, A.V. Cherkhaev (1997) Effective Characteristics of Composite Materials and the Optimal Design of Structural Elements. In: Cherkhaev A., Kohn R. (eds) Topics in the Mathematical Modelling of Composite Materials. Progress in Nonlinear Differential Equations and Their Applications, vol 31. Birkhäuser, Boston, MA
12. S. Tokarzewski, J. Telega (1998) Bounds on effective moduli by analytical continuation of the Stieltjes function expanded at zero and infinity, Zeitschrift für angewandte Mathematik und Physik ZAMP (1998) 49: 137. <https://doi.org/10.1007/s000330050085>
13. P.Pedersen, J.E. Taylor, (1993) Optimal design based on power-law non-linear elasticity, Editor: P.Pedersen, Optimal Design with Advanced Materials, Elsevier, 1993, Pages 51-66, ISBN 9780444898692, <https://doi.org/10.1016/B978-0-444-89869-2.50010-X>.
14. R. Motro (2011) Fifty years of progress for shell and spatial structures. IASS Jubilee Book, Multi-Sciences, 14 p., 2011.
15. H. Ohmori (2008) Computational Morphogenesis: Its Current State and Possibility for the Future, Proceedings of the 6th International Conference on Computation of Shell and Spatial Structures IASS-IACM 2008: "Spanning Nano to Mega" 28-31 May 2008, Cornell University, Ithaca, NY, USA, John F. ABEL and J. Robert COOKE (eds.)
16. Q. Li, A. Borgart, Y. Wu (2016) How to Understand 'Structural Morphology'?, Journal of the International Association for Shell and Spatial Structures, Vol. 57, No. 2 June n. 188, pp. 145-158(14), DOI: <https://doi.org/10.20898/j.iass.2016.188.765>
17. J. Lógó (2005) New Type of Optimal Topologies by Iterative Method, Mechanics Based Design of Structures and Machines, 33:2, 149-171, DOI: 10.1081/SME-200067035
18. B. Blachowski, W. Gutkowski (2010) A hybrid continuous-discrete approach to large discrete structural problem, Structural and Multidisciplinary Optimization Vol.41, No.6, pp.965-977. <https://doi.org/10.1007/s00158-009-0466-1>
19. B. Blachowski, P. Tazowski, J. Lógó (2018) Topology optimization of elastoplastic structures: Stress intensity driven formulation and functor-oriented implementation, CST2018, The Thirteenth International Conference on Computational Structures Technology 2018, 2018-09-04/09-06, Sitges, Barcelona (ES), No.0090, pp.1-3
20. S.Kaliszky, J.Lógó, (2002) Layout optimization of disks by the use of rigid-plastic elements, CAMES-Computer Assisted Mechanics And Engineering Sciences Vol. 9, No. 2, pp. 183-189, 7 p.
21. S.Kaliszky, J.Lógó, (2002) Layout and shape optimization of elastoplastic disks with bounds on deformation and displacement, Mechanics of Structures and Machines 30: 2 pp. 177-191, 15 p.
22. J. Lógó, B. Balogh, E. Pintér (2018) Topology optimization considering multiple loading, Computers & Structures, Volume 207, 2018, pp. 233-244, <https://doi.org/10.1016/j.compstruc.2017.03.018>
23. B. Blachowski, P. Tazowski, J. Lógó (2019) Elasto-Plastic Topology Optimization Under Stochastic Loading Conditions. In: Rodrigues H. et al. (eds) EngOpt 2018 Proceedings of the 6th International Conference on Engineering Optimization. EngOpt 2018. Springer, Cham
24. L.L. Beghini, A. Beghini, N. Katz, W.F. Baker, G.H. Paulino (2014) Connecting architecture and engineering through structural topology optimization, Engineering Structures, Volume 59, 2014, Pages 716-726, <https://doi.org/10.1016/j.engstruct.2013.10.032>

25. G. Kazakis, I. Kanellopoulos, S. Sotiropoulos, N.D. Lagaros (2017) Topology optimization aided structural design: Interpretation, computational aspects and 3D printing, *Heliyon*, Volume 3, Issue 10, 2017, e00431, <https://doi.org/10.1016/j.heliyon.2017.e00431>

26. N. Aage, E. Andreassen, B.S. Lazarov & O. Sigmund (2017) Giga-voxel computational morphogenesis for structural design, *Nature*, volume 550, pages 84–86, 05 October 2017